

# Choosing a Bike Rack Location

## Recommended Wall Setbacks

For racks set parallel to a wall:

Minimum: 24"

Recommended: 36"

For racks set perpendicular to a wall:

With Aisle: 54"

No Aisle: 36"

Distance between racks:

Minimum: 24"

Recommended: 36"


## Recommended Street Setbacks

For racks set parallel to street:

Recommended: 60"

For racks set perpendicular to street:

Recommended: 103"

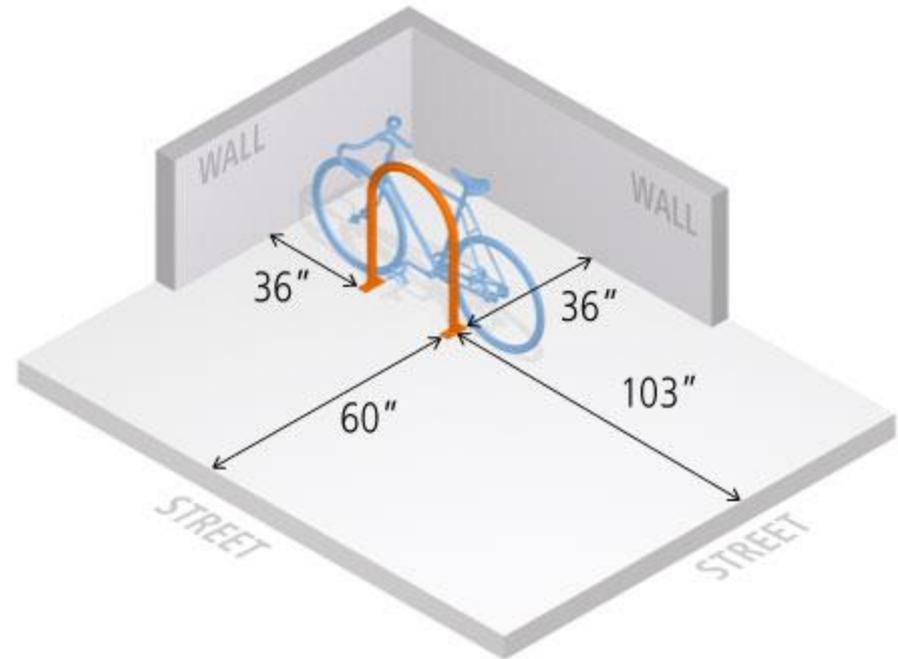

The Hoop Rack supports the bicycle at two points and allows for the wheel and frame to be secured using a u-style bike lock. Each Hoop Rack parks two bikes.